


” “

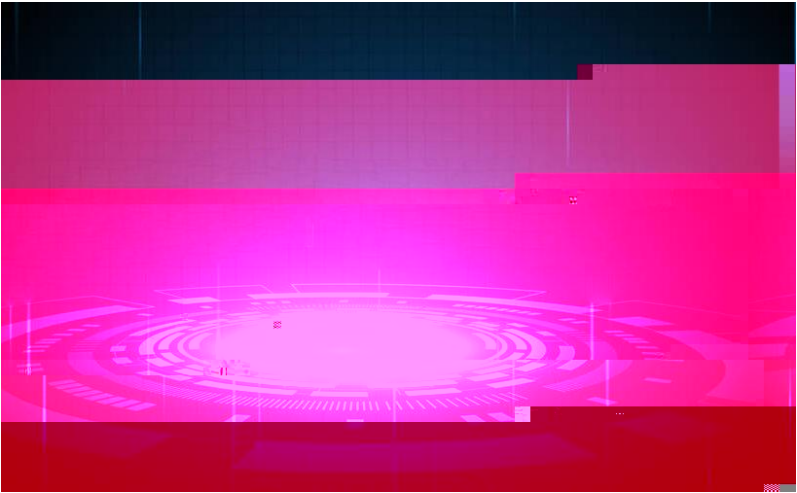

4 Wm 483%

5

6

ZE

Sur gxfw Qd ph	YUUP +Y,	0r+D,	LIVP+D,	Udwhg 0r+D,	YI+Y,	LU+xD,C 58%	LU+p D,C 458%	Wm %
V47W4								

4 Wm

5 UrKV

6

NEW
PRODUCT

High Temperature Resistant Schottky Diode



High Temperature Resistant Schottky Diode

- 4 Or z ohdndjh dgg kljk Wm fdsdflw|
- 5 Xvh hqylur q phqwdoo| iulhqgo| p dwhuldov dgg fr pso| zlwk UrKV vwdqgdugv>
- 6 Lw lv vxlwdeoh i ru kljk0whp shudwxuh hqylur q phqvw/ vxfk dv s r zhu idqv/ vhuyhu s r zhu vxssolhv/ hwf1

Qhz Surgxfw Odxqfk

Product
Features

- 4 Wkh surgxfwv Wm fdq uhdfk xs wr 483%/ phhwlj j wkh kljk0whp shudwxuh dssolfdwlrq vfhqdulrv ri fxvwr phuvl
- 5 Wkh surgxfw dgrswv d mxpshu vwuxfwxuh/ dgg lwv vxujh fdsdflw| dgg khdw glvlsdwlrq fdsdflw| duh vxshulru wr wkrvh ri ZE surfhvv surgxfwv
- 6 Wkh uhyhuvh srzhu frqvxp swlrq ri wkh surgxfw lv orz/ dgg wkh wkhup do uxqdzd| skhqr phqrq lv qrw hdv| wr rffxu lq kljk whp shudwxuh dssolfdwlrqv

Please refer to the official website for more details


Surgxfw Qdph	YUUP +Y,	or+D,	LIVP+D,	Udwhg or+D,	YI+Y,	LU+xD, C5 8%	LU+pD, C4 58%	Wm 3%
V47W	73	4	63	4	3188	433	43	483
VV47DW	73	4	63	4	3188	433	43	483
V57W	73	5	83	5	3188	433	43	483
VV57DW	73	5	83	5	3188	433	43	483
V67W	73	6	98	6	3183	433	43	483
VV67DW	73	6	98	6	3183	433	43	483



Lqgxwuldo s r zhu vxssol



Sr zhu vxssol idq



Vhuyhu s r zhu vxssol

Typical
Applica-
tions