


◆

Package	Tape Width	Reel Size	Pitch	Packaging Quantity			Tape Orientation	OPN Suffix
				Reel	Inner Box	Carton	Feed Direction	
	mm	inch	mm	kpcs	kpcs	kpcs		
TOLL	24	13	12	2	4	20		F1 ESD/MBB bag

- Note 1: All MOSFETs and other MSL3 products come with an ESD/MBB bag.
- Note 2: These are minimum package quantities only. Minimum order quantities may vary. Please contact your sales representative for more information on minimum order quantities.
- Note 3:YJ Tape&reel products meets EIA-481 specification.
- Note 4: Please refer to the product datasheet for MSL level, RoHS and Halogen-Free compliance.
- ◆

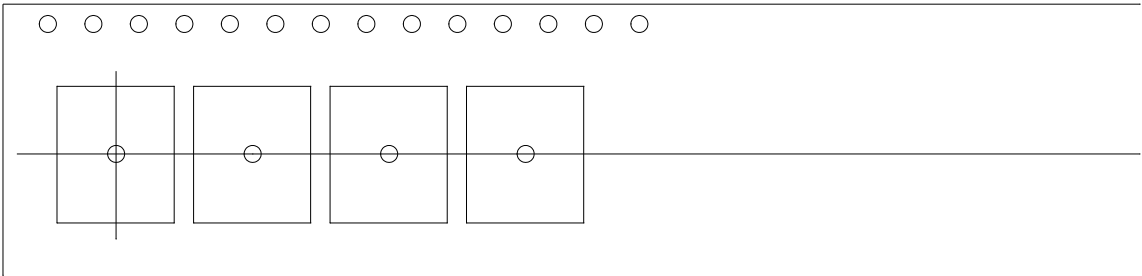

Tape Width	W(mm)	A0(mm)	B0(mm)	K0(mm)	E(mm)	F(mm)	P(mm)
------------	-------	--------	--------	--------	-------	-------	-------

Note 5: A0, B0, and K0 are determined by component size. The clearance between the components and the cavity must be within 0.05 mm min to 0.50mm max.

Note 6: For machine reference only including draft and radii concentric around B0

